
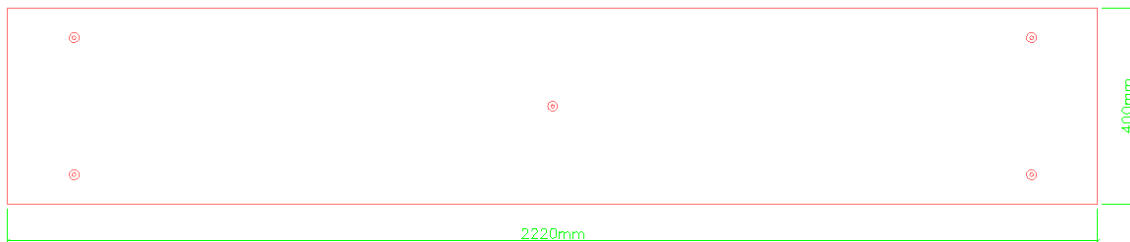


### TECHNICAL SPECIFICATION SHEET

#### GRC (Glass-fibre Reinforced Concrete) Decking

General	
<b>Design Live Loading</b>	4.0kN/m <sup>2</sup> (standard walkways @ 500mm support centre's)
<b>Concrete</b>	Grade 40N
<b>Reinforcement</b>	GFRP Rebar or 5% AR Glass-fibre
<b>Weight</b>	2200kg/m <sup>3</sup>
<b>Surface Finish</b>	Smooth Non-slip GRC (Non-slip tests available)
<b>Colour</b>	Salmon Pink (other colours available on request)
<b>Fixings</b>	Galvanised/Stainless Steel TEK-Screws

Dimensions	
<b>Width</b>	400mm
<b>Lengths</b>	570mm, 820mm, 1020mm, 1320mm, 1820mm, 2220mm, 2820mm
<b>Thickness</b>	15mm – 30mm



**Patent No. S77154**